



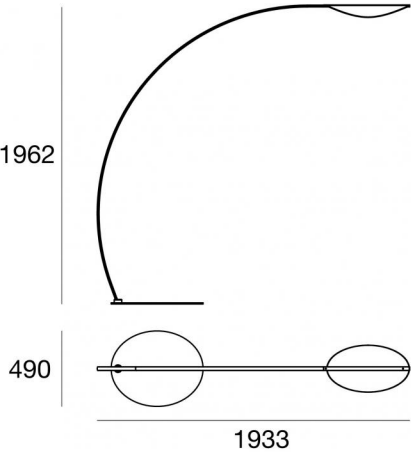

Stehleuchten | 220-240 V
200 topLED 25 W DC - 30 W AC | CRI 90
8165



Technische Daten	
Jahr der Verwirklichung	2016
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	General Lighting
Light emission direction	downward and upward
Lampenleistung	25 W
Lichtstrom (Lichtquelle)	3294 lm
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.5 m
Steckdose	Type F+E
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	19.040 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Gehäuse	
Material	Aluminium
Farbe	Weiß geprägt RAL 9003
Bearbeitungstyp	Lackierung
Oberfläche Diffusor	
Material	PMMA
Farbe	transparent
Oberfläche Fassung	
Material	Metall
Farbe	Weiß geprägt RAL 9003
Bearbeitungstyp	Lackierung

Stehleuchten | 220-240 V | 200 topLED 25 W DC - 30 W AC | CRI 90
8165

Double emission floor lamp for indoor application. The warm white LED light source with a general lighting light distribution is composed of 200 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3294 lm, with a 131.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pmma with a laser engravings treatment; the mounting frame is made of metal, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 19.040 kg.

The total absorbed power is 30 W. The power supply cable is included and features a 2.5 m lenght.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	75 %
Lichtstrom (Lichtquelle)	3294 lm
Leuchten Lichtstrom	2489 lm
Consumption	30 W
Leuchten Lichtausbeute	82 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25
LED Life / Failure Ratio	
L80 B20 C0 80000h	
OPTICAL	
Light distribution simmetry	Symmetrical 2
Optik C0/C180	180°

